


Continuous Spinner

Production Logging Tools

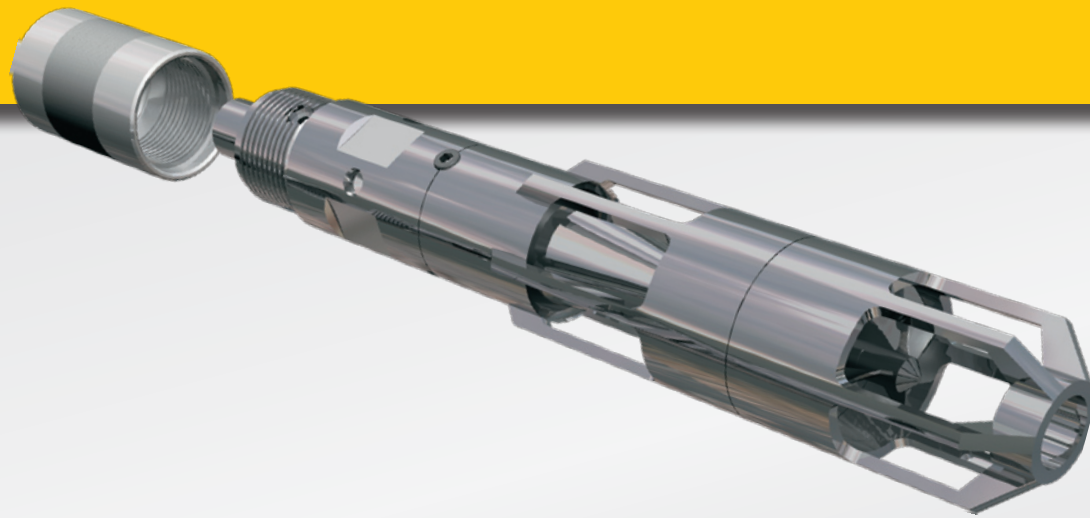

- ▶ Impeller is integrated into tool body
- ▶ Effective in restricted boreholes, tubing, and high flow velocity
- ▶ Available in 1.375 in. to 2.125 in. diameters
- ▶ 3.28 ft/min (1 m/min) threshold velocity
- ▶ 0.037 rps/ft/min (0.12 rps/m/min) spinner response

| | 1.375 in. | 1.688 in. | 2.125 in. |
|-----------------|------------------------|------------------------|------------------------|
| OD | 1.375 in. (3.5 cm) | 1.688 in. (4.3 cm) | 2.125 in. (5.4 cm) |
| Length | 8.7 in. (22 cm) | 9.1 in. (23 cm) | 9.25 in. (23.5 cm) |
| Weight | 2.2 lb (1 kg) | 2.4 lb (1.1 kg) | 2.8 lb (1.3 kg) |
| Temp. Rating | 350°F (175°C) | 350°F (175°C) | 350°F (175°C) |
| Pressure Rating | 15,000 psi (103.5 MPa) | 15,000 psi (103.5 MPa) | 15,000 psi (103.5 MPa) |

Power Requirements:

| | | | |
|------------------|---|---|---|
| 18V (memory) | N/A - Mechanical, end-of-string device. | N/A - Mechanical, end-of-string device. | N/A - Mechanical, end-of-string device. |
| 100V (telemetry) | | | |

| | | | |
|------------|-------------|-------------|-------------|
| Part# | AM005W*0003 | AM005W*0004 | AM005W*0007 |
| O-Ring Kit | AM005RM0003 | AM005RM0004 | AM005RM0007 |



* Enter "A" for standard service or "B" for H₂S service.