


Assembly Part Number: TBD

Description: BOP 10K 4" Type O Lightweight Quad

Working Conditions		
Maximum Working Pressure		10,000 psi
Test Pressure		15,000 psi
Operating Temperature Range		-40°F / 250°F (-40°C / 121°C)
Elastomer Temperature Range		-40°F / 320°F (-40°C / 160°C)
Primary Service/Other Service		H2S/CO2
Design Specification		
Top Connection (Box)	Thread Size	6.5"
	TPI	4
	Seal Diameter	4.75"
Bottom Connection (Pin & Collar)	Thread Size	6.5"
	TPI	4
	Seal Diameter	4.75"
Standard Hydraulic Connection		Lee Specialties Standard
Hydraulic Working Pressure		3,000 psi
Equalizing Ports		Above/Below Ram Set
Bleed-Off Port		½" NPT Above Ram Set
Configuration		Quad
Ram Set 1		0-3/8" Universal Seal
Ram Set 2		0-3/8" Universal Seal
Ram Set 3		0-3/8" Universal Seal
Ram Set 4		0-3/8" Universal Seal
Elastomer Type		HNBR
Material		4130/4140
Dimensions		
Internal Diameter		4.06"
Overall Width		45"
Overall Height		50"
Made-Up Height		46"
Overall Depth		10.2"
Weight		1,140 lbs. (517 kg)
Design Criteria		
API 6A (Latest Edition)		Yes
NACE MR 0175 (Latest Edition)		Yes
Accessories		
Stand		TBD
BOP Bridle Hose (LS Standard)		AM683UU0008-Q1
BOP Valve Ratchet Wrench		PM683UU0048
Seal Kit		TBD

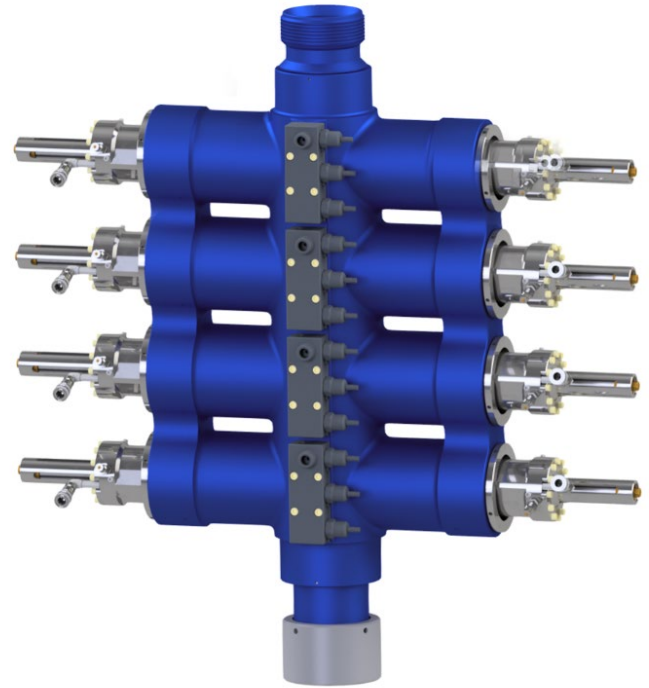

Additional Information: Phosphate Coated



All equipment renderings are included as a visual aid and may or may not be drawn to scale of the delivered product. Please refer to the engineered drawings provided with your equipment documentation for an accurate depiction of the physical properties and/or dimensions.