


Assembly Part Number: AM807UU0243

Description: 10K Dual Air Grease Injector w/ Accumulator

Working Conditions	
Maximum Hydraulic Pressure	15,000 psi
Design Specification	
Primary Air Pumps	2 x 140:1 Lincoln Air Pumps
External Air Source Required	25 cfm @ 120 psi
Secondary Air Pump	1 x 40:1
Hydraulic Operated Hose Reel 1&2	175' of 15,000 psi 1/2" Grease Injection Hose
Hydraulic Operated Hose Reel 3	175' of 15,000 psi 1/2" Grease Return Hose
Manual Hose Reel	4 x 125' of 4,800 psi 3/8" BOP Control Hose
Hand Pumps	3 x 175' of 4,800 psi 1/4" Hose for Tool Catcher, Packoff, & Tool Trap
Hydraulic Couplers	LS Standard
Transportation	4-Point Lift/Forklift Pockets
Frame Material	Mild Steel
Control Panel Material	Stainless Steel
Dimensions	
Overall Width	52.5"
Overall Height	70.63"
Overall Length	95"
Split Grease Tank Capacity	283.91 L (75 US Gal)
Hydraulic Tank Capacity	68.14 L (18 US Gal)
Accumulator Bottle	1 x 18.92 L (5 US Gal)
Max Gross Weight	3,307 lbs. (1,724 kg)
Assembly Includes	
Emergency Engine Shutdown	
Hoses	
Lifting Slings	

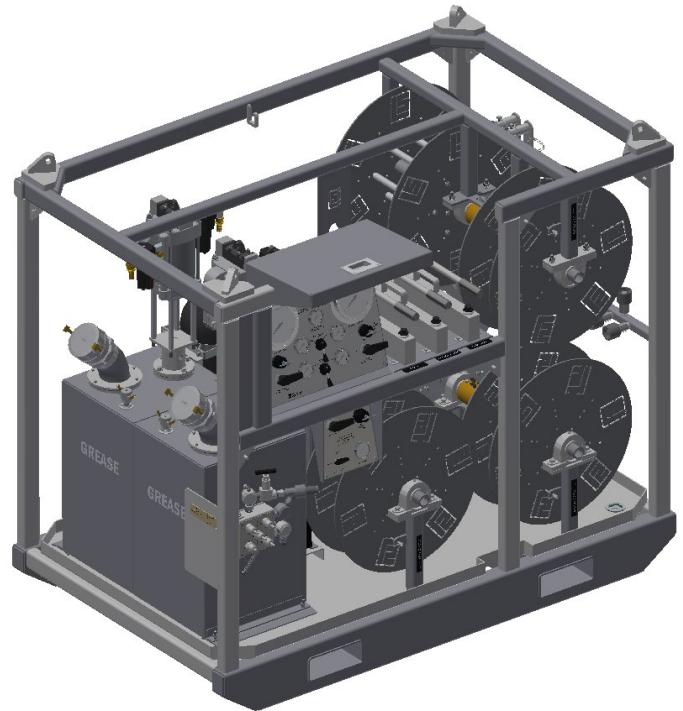

All equipment renderings are included as a visual aid and may or may not be drawn to scale of the delivered product. Please refer to the engineered drawings provided with your equipment documentation for an accurate depiction of the physical properties and/or dimensions.